

# BioCompact RR310/RF210



Biostorage you can depend on



Comes in two boxes and must be assembled before use.

The **BioCompact 310 and 210** provides you with significantly better performance than any other cabinets in this segment, on account of a refrigeration system that does away with cold walls that can damage the contents and a unique air distribution system for storing ordinary biomaterial under consistent, stable conditions.

The design and combination of the **BioCompact 310 and 210** ensures you many ways to deal with individual storage needs, thanks to the versatile interior layout and a comprehensive selection of fixtures and fittings. The combination makes it the perfect biostorage unit. It is designed for a wide range of basic biostorage purposes where the prime focus is on dependability and exceptional performance.

The **BioCompact 310 and 210** uses environmentally responsible HFC-free foam propellants and is available with HFC-free refrigerants. Based on decades of specialist know-how, these biostorage units are exceptionally energy-efficient, and are the best performers on the market in relation to Scandinavian standards.

Available in either white or stainless steel finish, with a one-piece moulded ABS inner lining. Shelves and drawers are mounted in U-shaped rails moulded into the plastic walls.



The BioCompact 310 refrigerator is available in either white or stainless steel finish. BioCompact refrigerators can be equipped with a solid door with lock or glass door with LED light and lock.

The BioCompact 210 freezer is available in either white or stainless steel finish. BioCompact freezers are equipped with a solid door with lock.



II 3G Ex nA nC nL IIB T4 Gc

TÜV 10 ATEX 381563 X (210)

Biostorage  
you can  
depend on

Version 03. Valid from 23.02.21



Designed and manufactured in Denmark since 1901



# BioCompact RR310/RF210



Biostorage you can depend on

## Top panel with BioLine control unit

The MPC unit is specially developed for users of BioLine storage cabinets. Among its many features are acoustic door alarm, and a voltage free contact (NO/NC) for remote alarms. The display can be locked.



## Access port

24.5 mm port for ease of access, e.g. sensors for external temperature surveillance.




## Voltage free contact

Provides a remote alarm in case of power failure or door alarm, with separate delay.



## Finned tube evaporator

Using a refrigeration system based on a finned tube evaporator is unique for biostorage products in this segment, and provides unparalleled benefits. The design results in a refrigerated storage space with no cold walls that can damage any delicate items stored in the cabinet. This also makes it possible to ensure even better temperature stability inside the cabinet.

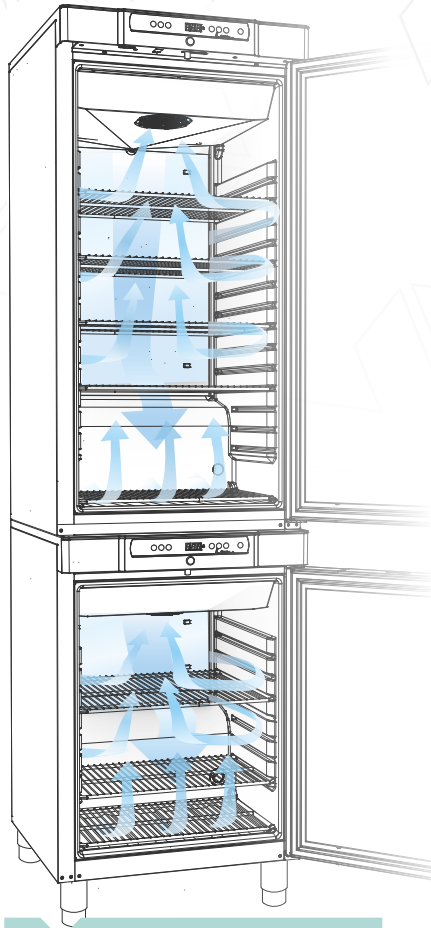

## Shelves and drawers

A wide range of versatile interior fittings and layouts is available. The operating specifications and the interior layout can both be customised.



## ATEX

All BioCompact models comply with ATEX Cat.3 Zone 2 requirements, both internal and externally, allowing for placement in locations where explosive gas atmospheres may be present.

## AIR DISTRIBUTION

The unique Gram BioLine air distribution system makes sure the temperature inside the cabinet remains stable at all times. With the finned tube evaporator placed in the top, there are no cold walls inside the cabinet.

Technical specifications	BioCompact RR310	BioCompact RF210
Temperature range	+2/+20°C	-25/-5°C
Ambient temperature range	Solid door +10/+35 °C; glass door (RR) +10/+32 °C	
Control Unit	Gram Control Unit with voltage-free contact, acoustic and visual door alarms that can be programmed individually, and offset function	
Material interior	ABS lining	
Material Exterior	White lacquered steel or stainless steel finish	
Dimensions mm (W x D x H)	595 x 640 x 1991/2191	
Gross volume	218 litres/7.8 cubic feet	125 litres/4.4 cubic feet
Net volume	189 litres/6.7 cubic feet	104 litres/3.7 cubic feet
Net weight	Unpacked net weight without optional fittings: 101 kg	
Modules for shelves and drawers	Shelves 11x430 mm + 3x300 mm and 4x430 mm + 3x300 mm Drawers 5x 420mm + 2x 300mm und 2x 420mm + 2x 300mm	
Insulation	50 mm polyurethane with HFC-free cyclopentane propellant	
Refrigerant	R600a or R134a	
K-value	Solid door 0.3550 W/m²K; Glass door 0.5061 W/m²K	Solid door 0.3559 W/m²K
CO <sub>2</sub> e	R134a: 136	R134a: 100
Refrigeration capacity at -10 °C	R600a 154 Watt / R134a 173 Watt	-
Refrigeration capacity at -25 °C	-	R600a 156 Watt / R134a 149 Watt
Energy consumption	2.16 kWh/24h	
Sound level	40,9 dB(A)	
Base	Legs*	
Connection	230 V, 50 Hz	
Air system	Gram BioLine ventilated air distribution system	
Defrost system	Automatic smart defrost with re-evaporation of defrost water	

\* The cabinets can also be delivered with castors at no extra charge